

PRD 3ft indirect/direct




Our Performance Decorative luminaires offer a variety of decorative forms and sizes, suitable for any modern space.


Features

- Cold-rolled steel housing
- Specifiable color temperature. CRI > 90, R9 > 50
- Integral, specifiable dimmable drivers or PoE
- Custom colors and wood finishes available
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)

Dimensions

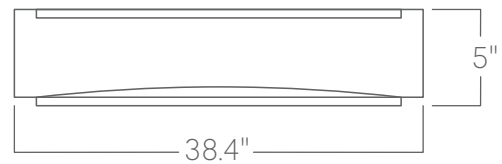

Optics

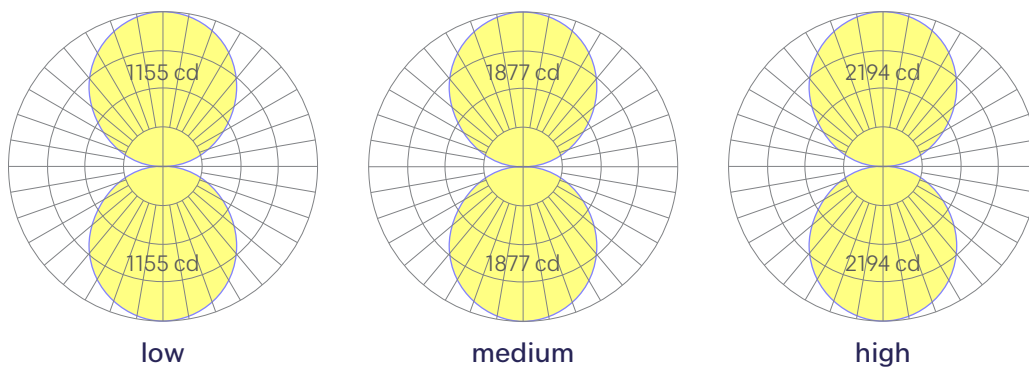

Representative distribution and peak candela. For other options see order information or IES files [here](#).

PRD 3ft indirect/direct

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1 Fixture ID	2 Length	3 Color Temperature	4 Output
PRD UPDN	3 3 ft	27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI 50 5000K/90 CRI WD Warm Dim 2200K-3000K <small>Must use WD10 driver.</small> TW Tunable White 2700K-6500K <small>Must use TW10 driver.</small>	Indirect LOW Low output MED Medium output HIGH High output CUST Custom output <small>Specify Watts or lumens</small> Direct LOW Low output MED Medium output HIGH High output CUST Custom output <small>Specify Watts or lumens.</small>
5 Voltage	6 Driver	7 Finish	8 Mounting
UNV Universal (120/277V) 347V 347V <small>Available for DB driver only</small>	DB Standard 0-10V 1% DB.1% 0-10V 0.1% ELV Reverse Phase 1% (120V only) <small>For compatible dimmers see here.</small> TRI Forward Phase (120V only) <small>For compatible dimmers see here.</small> LDE Lutron Digital EcoSystem DALI DALI-2 driver PoE Power over ethernet. TW10 Dual channel, 0-10V for tunable white. WD10 0-10V warm dim DMX DMX512 <small>All DMX drivers set to default address 001 and provided in remote enclosers. Contact us for other addressing needs</small>	W White BLK Black SLV Silver CC Custom Color <small>See finish options here.</small> CWF Custom Wood Finish <small>See finish options here.</small>	AC-CENT Aircraft Cable <small>Suspended from a center canopy. 50" steel cable provided. White canopies and power cord unless option specified in section 12.</small> AC-MULTI Aircraft Cable <small>Individual suspension points. 50" steel cable provided. White canopies and power cord unless option specified in section 12.</small> PS-X Pendant Stem <small>(12", 18", 24", 36", 48") White stems, canopies and power cord unless option specified in section 12.</small>
9 Optics	10 Sensors/Controls	11 Circuit	12 Options
Indirect SD Standard Diffuser Direct SD Standard Diffuser DL 1/2" Drop Lens	NA None ACM Acuity nLight Module Only CCS Casambi Module AWNDR Lutron Athena Wireless Node Module OTHER Consult Factory	NA None DC Dual circuit (separate indirect/direct control) <small>May require additional power feeds.</small> EMPCK Emergency battery pack EMCKT Emergency circuit <small>May require additional power feeds</small> DAYCKT Daylight circuit <small>May require additional power feeds.</small>	NA None

Performance

Output ¹	Indirect		Direct	
	Watts	Lumens	Watts	Lumens
Low	40	3292	40	3292
Medium	65	5350	65	5350
High	76	6254	76	6254

¹Based on a typically configured 90 CRI, 3500K luminaire using one driver.
Custom outputs available. Please consult factory.
For 4000K multiply by 1.05; for 3000K, 0.9%; for 2700K, 0.92.

Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details

PRD 3ft indirect/direct

Drivers & Electrical

Integral drivers* with 0-10V Dimming standard. Several other driver options available; see ordering information.

*DMX drivers are provided in remote enclosures.

Emergency Back-Up

Emergency, battery-powered drivers are available. Emergency circuits for use with building generators are also available.

PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Moxel Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox.

Consult factory for systems not listed. See [here](#) for more info.

Weight

45 lbs

Optics

Custom opal lens provides excellent diffusion, high transmission, and no LED imaging.

Construction

Cold-rolled steel.


Finishes

All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.


PRD 3ft indirect/direct

Mounting Options


Custom mounting types and ceiling transitions available; consult factory.

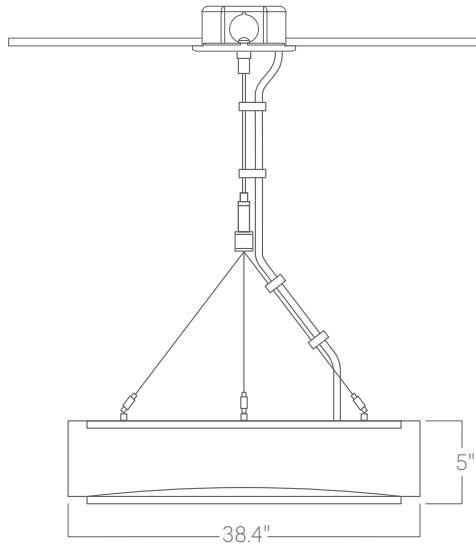

Aircraft cable

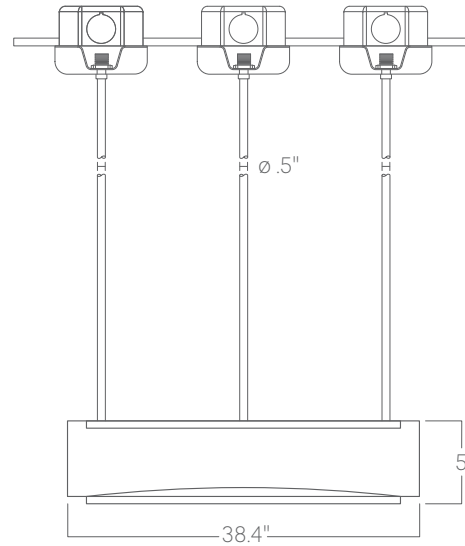

Pendant stem (4 stems)

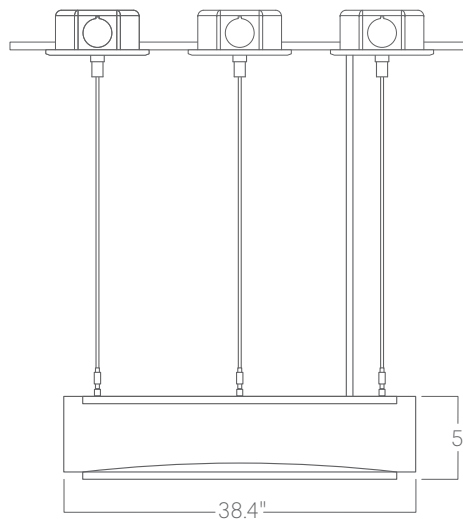

Aircraft cable (individual susp. points)

Please consult factory shop drawings for suspension points.

To prevent damage to fixtures, factory designated suspension points must not be field altered.

Do not attempt installation if you do not understand the installation instructions.