


Ray4 direct

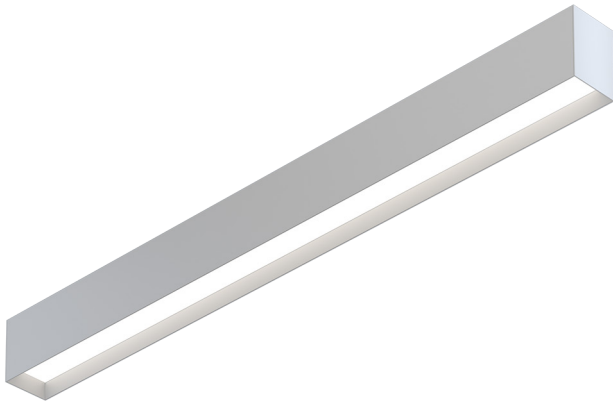


Our linear architectural luminaires offer a wide range of profiles and mounting options. Custom lengths and patterns are tailored to suit any modern space.


Features

- Extruded, recycled, aluminum housing
- Aluminum core LED boards, specifiable output
- Specifiable color temperature. CRI > 90, R9 > 50
- Custom lengths, welded patterns, and finishes available
- Integral specifiable dimmable drivers or PoE
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)

Dimensions



Optics

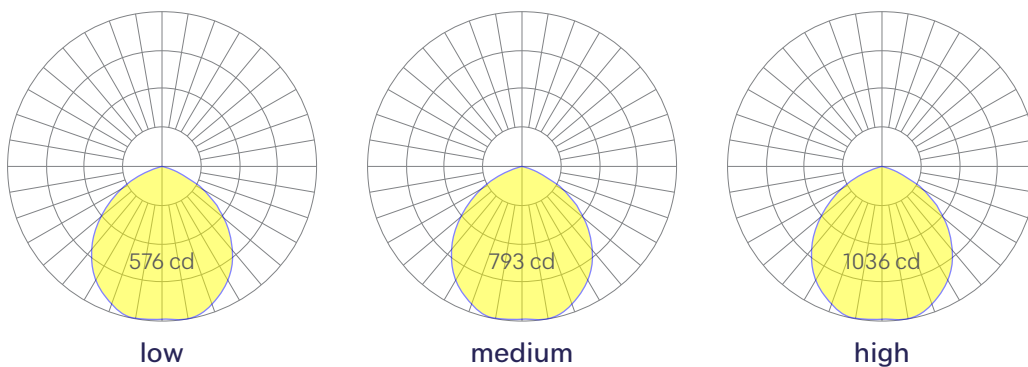

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Ray4 direct

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Length	3	Color Temperature	4	Output
	RAY4	2	2 ft	27	2700K/90 CRI	LOW	Low output
		4	4 ft	30	3000K/90 CRI	MED	Medium output
		8	8 ft	35	3500K/90 CRI	HIGH	High output
		X'-X"	Specify Length	40	4000K/90 CRI	CUST	Custom output Specify watts or lumens
		PAT	Pattern (Consult Factory)	50	5000K/90 CRI		
				WD	Warm Dim 2200K-3000K Must use WD10 driver		
				TW	Tunable White 2700K-6500K Must use TW10 or PSQ driver		
				RGBW30	RGB +white, 3000k Remote DMX. High output unavailable.		
				RGBW35	RGB +white, 3500k Remote DMX. High output unavailable.		
				RGBW40	RGB +white, 4000k Remote DMX. High output unavailable.		
5	Voltage	6	Driver	7	Finish	8	Mounting
UNV	Universal (120/277V)	DB	Standard 0-10V 1%	W	White	AC	Aircraft cable (50")
347V	347V Available for DB driver only	DB.1%	0-10V 0.1%	BLK	Black	AC3.5	3.5" canopy + Jbox adaptor adaptor must be mudded-in.
		ELV	Reverse Phase 1% (120V only) For compatible dimmers see here .	SLV	Silver	ACCC	Aircraft cable to Conduit Pipe Canopy
		TRI	Forward Phase (120V only) For compatible dimmers see here .	CC	Custom Color See finish options here .	PS-X	Pendant stem (12", 18", 24", 36", 48")
		LDE	Lutron Digital EcoSystem	CWF	Custom Wood Finish See finish options here .	SMHC	Surface Mount, Hard Ceiling
		DALI	DALI-2 driver			WM	Wall Mount
		PoE	Power over ethernet.				
		TW10	Dual channel, 0-10V for tunable white.				
		WD10	0-10V warm dim				
		PSQ	Lutron T-Series 2-channel 1% for tunable white				
		DMX	DMX512 All DMX drivers set to default address 001 and provided in remote enclosers. Contact us for other addressing needs				
9	Optics	10	Sensors/Controls	11	Circuit	12	Options
SD	Standard Diffuser	NA	None	NA	None	STD	White canopy + white cord
		ACM	Acuity nLight Module Only	EMPCK	Emergency battery pack	CAN-X	Canopy + color See finish options here .
		CCS	Casambi Module	EMCKT	Emergency circuit May require additional power feeds.	SJ-BLK	Black cord
		AWNR	Lutron Athena Wireless Node Module	DAYCKT	Daylight circuit May require additional power feeds.	SJ-WHT	White cord
		OTHER	Consult Factory				

Performance

Output ¹	Watts/ft	Lumens/ft
Low	5	401
Medium	7	551
High	10	720

¹Based on a typically configured 90 CRI, 3500K luminaire using one driver.
Custom outputs available. Please consult factory.
For 4000K multiply by 1.05, for 3000K, 0.9%, for 2700K, 0.92.

Technical Information



click [here](#) or
scan QR code

Wiring diagrams, PoE and sensor details

Ray4 direct

Drivers & Electrical

Integral drivers* with 0-10V Dimming standard. Several other driver options available; see ordering information.

*DMX drivers are provided in remote enclosures.

Sensors & Controls

Sensors are installed on an aluminum plate adjacent to the luminaire lens¹. Coronet remains agnostic in our approach to sensors and control systems; our fixtures are compatible with most systems offered.

¹Not applicable to indirect only models. Consult factory.

Emergency Back-Up

For fixtures three-feet or longer, a 4W integral emergency driver may be wired to 4ft sections. 7W, 10W, and 12W drivers are also available (not all integral; consult factory). Emergency circuits for use with building generators are also available.

PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Moxel Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox.

Consult factory for systems not listed. See [here](#) for more info.

Finishes


All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.

Weight

6 lbs per foot

Patterns

Featuring illuminated welded corners and angles. Consult factory for custom designs and elevations.

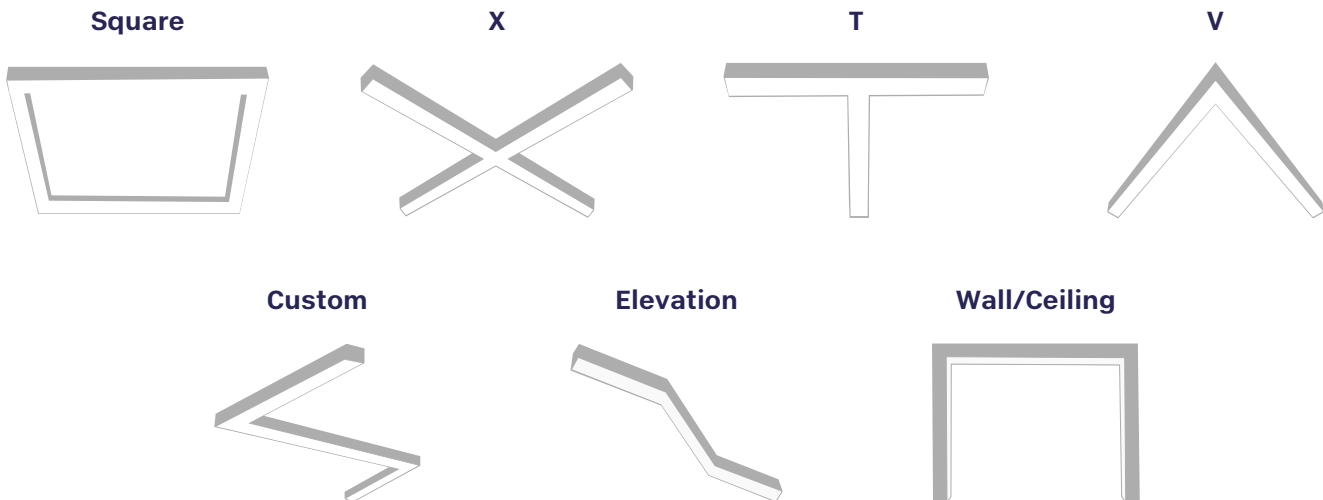

Optics


Extruded satin acrylic lenses provide excellent diffusion, high transmission, and no LED imaging.

Construction

Housings are extruded premium, recycled aluminum. Individual fixtures are available up to 12' long and may be specified as nominal or precision lengths. Precision lengths are supplied within 1/8" tolerance.

Joined Runs


Runs of any length may be specified and are comprised of multiple, factory-engineered, joined sections. Individually specified luminaires are not field joinable.

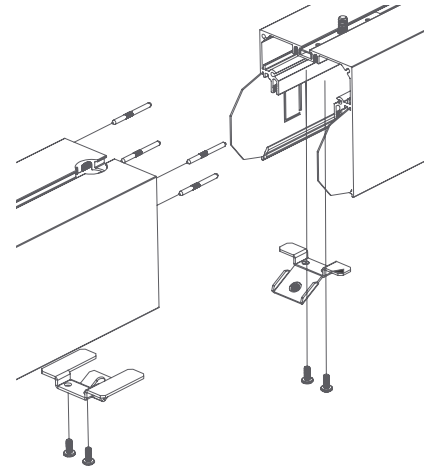


Representative joinery. For product specific details see installation guides or submittal drawings.

Mounting Options


Custom mounting types and ceiling transitions available; consult factory.

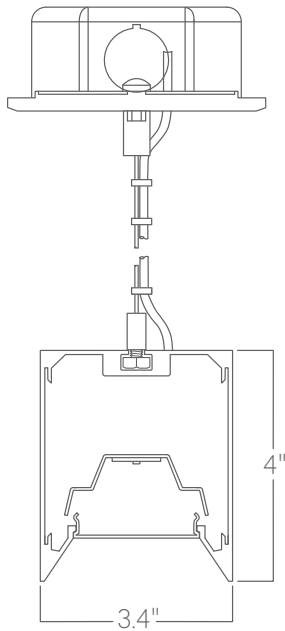


Aircraft cable

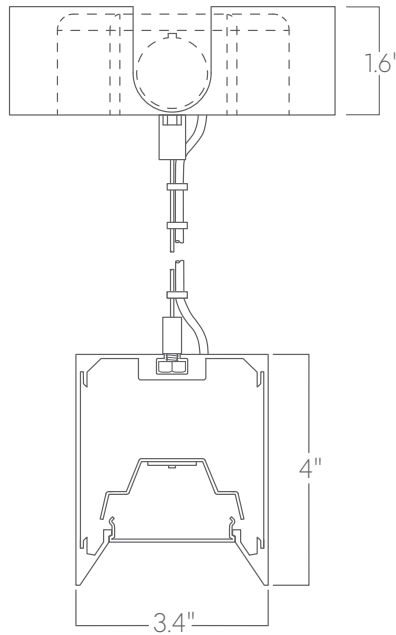


**Aircraft cable
Conduit canopy
with knockouts**

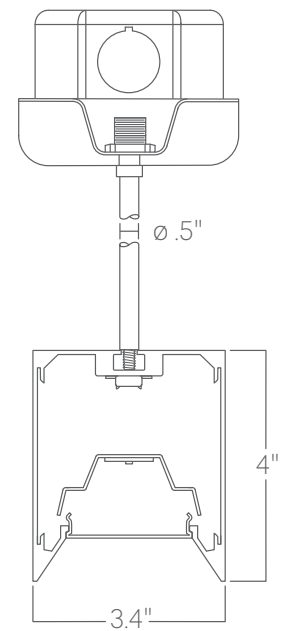

Pendant stem

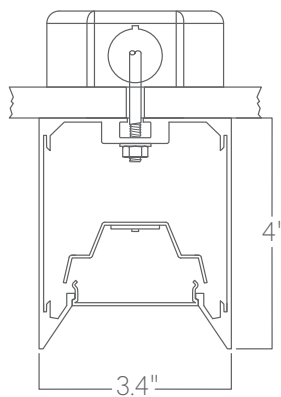

Surface mount

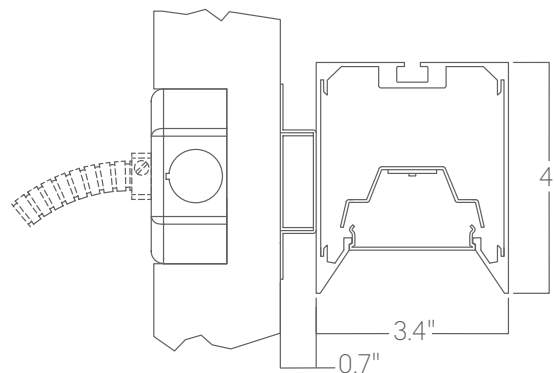

Wall mount

Please consult factory shop drawings for suspension points.

To prevent damage to fixtures, factory designated suspension points must not be field altered.

Do not attempt installation if you do not understand the installation instructions.