


# Rush indirect/direct

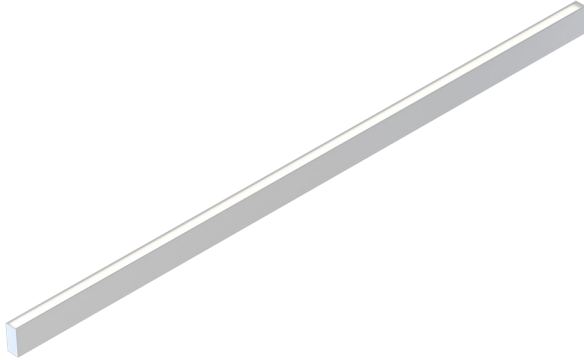


Our linear architectural luminaires offer a wide range of profiles and mounting options. Custom lengths and patterns are tailored to suit any modern space.


## Features

- Power over aircraft cable system
- Extruded, recycled aluminum housing
- Aluminum core LED boards, specifiable output
- Specifiable color temperature. CRI > 90, R9 >50
- Custom lengths, welded patterns, and finishes available
- Specifiable dimmable drivers or PoE
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)

## Dimensions



## Optics

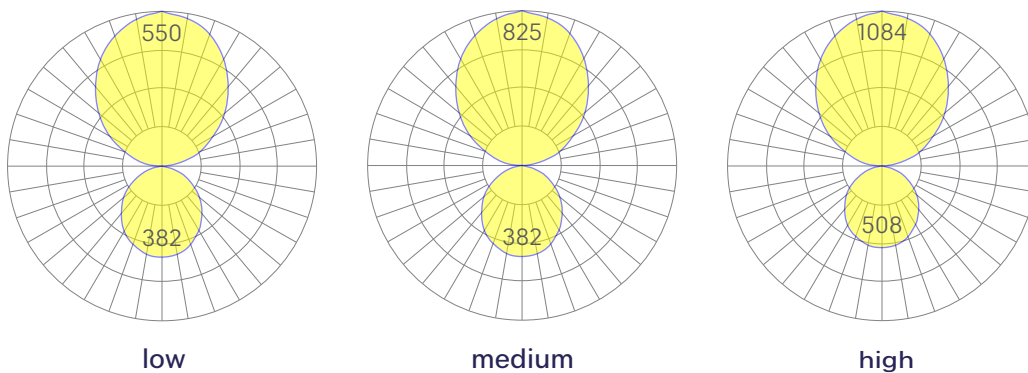

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# Rush indirect/direct

## Ordering Information



Example: RUSH UPDN - 8 - 35 - MED - MED - UNV - DB - W - AC - SD - SD - CCS - DAYCKT - NA

<b>Fixture ID</b> <input type="text" value="1"/>	<b>Length</b> <input type="text" value="2"/>	<b>Color Temperature</b> <input type="text" value="3"/>	<b>Output</b> <input type="text" value="4a-"/> <input type="text" value="4b-"/>
<b>RUSH UPDN</b>	<b>2</b> 2 ft <b>4</b> 4 ft <b>8</b> 8 ft <b>X'X"</b> <sup>1</sup> Specify Length <b>PAT</b> Pattern (Consult Factory)  <small><sup>1</sup>Custom lengths available in 1" increments</small>	<b>27</b> 2700K/90 CRI <b>30</b> 3000K/90 CRI <b>35</b> 3500K/90 CRI <b>40</b> 4000K/90 CRI	<b>4a - Indirect</b> <b>LOW</b> Low output <b>MED</b> Medium output <b>HIGH</b> High output <b>CUST</b> Custom output <sup>1</sup>  <b>4b - Direct</b> <b>LOW</b> Low output <b>MED</b> Medium output <b>HIGH</b> High output <b>CUST</b> Custom output <sup>1</sup>  <small><sup>1</sup>consult factory</small>
<b>Voltage</b> <input type="text" value="5"/>	<b>Driver</b> <input type="text" value="6"/>	<b>Finish</b> <input type="text" value="7"/>	<b>Mounting</b> <input type="text" value="8"/>
<b>UNV 347V</b> <sup>1</sup> Universal (120/277V) 347V	<b>DB</b> Standard 0-10V 1% <b>DB.1%</b> 0-10V 0.1% <b>ELV</b> <sup>2</sup> Reverse Phase 1% (120V only) <b>TRI</b> <sup>2</sup> Forward phase (120V only) <b>LDE1</b> Lutron Digital EcoSystem <b>DALI</b> DALI-2 Driver <b>PoE</b> Power over Ethernet. <b>DMX</b> <sup>1</sup> DMX512  <small><sup>1</sup>Set to default address 001. Contact us for other addressing needs. <sup>2</sup>For compatible dimmers, click <a href="#">here</a>.</small> <small>All drivers remote</small>	<b>W</b> White <b>BLK</b> Black <b>SLV</b> Silver <b>CC</b> <sup>1</sup> Custom Color <b>CWF</b> <sup>1</sup> Custom Wood Finish  <small><sup>1</sup>Custom Color. See finish options <a href="#">here</a>. White SJ cord and canopy provided; for other requests, see section 12 to specify.</small>	<b>ACP</b> Power Over Aircraft Cable <b>AC</b> Aircraft Cable (50") <b>AC3.5</b> 3.5" canopy + jbox adaptor <sup>1</sup> <b>ACPC</b> <sup>2</sup> Aircraft cable to Conduit Pipe Canopy <b>WM</b> Wall Mount  <small><sup>1</sup>Adaptor must be mudded-in. White stems and canopy provided unless otherwise specified in options (section 12). <sup>2</sup>Not available with Power Over Aircraft Cable.</small>
<b>Optics</b> <input type="text" value="9a-"/> <input type="text" value="9b-"/>	<b>Sensors/Controls</b> <input type="text" value="10"/>	<b>Circuit</b> <input type="text" value="11"/>	<b>Options</b> <input type="text" value="12"/>
<b>9a - Indirect</b> <b>SD</b> Standard Diffuser  <b>9b - Direct</b> <b>SD</b> Standard Diffuser	<b>NA</b> None <b>ACM</b> Acuity nLight Module Only <b>CCS</b> Casambi Module <b>AWNRR</b> Lutron Athena Wireless Node Module  <small>All control systems are remote. Consult factory for other options.</small>	<b>NA DC</b> <sup>1</sup> None <b>DC</b> <sup>1</sup> Dual Circuit (separate indirect/direct control) <b>EMPCK</b> Emergency battery pack <b>EMCKT</b> <sup>1</sup> Emergency circuit <b>DAYCKT</b> <sup>1</sup> Daylight circuit  <small><sup>1</sup>May require additional power feeds. Consult factory</small>	<b>For Aircraft Cable (AC) fixtures,</b> <b>STD</b> White Canopy + White Cord <b>CAN-X</b> <sup>1</sup> Canopy + color <b>SJ-X</b> <sup>2</sup> SJ Cord + color  <b>For Power Over Wire (ACP) fixtures,</b> <b>STD</b> White Canopy + ACP <sup>3</sup> <b>CAN-X</b> <sup>1</sup> Canopy + color + ACP <sup>3</sup>  <small><sup>1</sup>See finish options <a href="#">here</a>. <sup>2</sup>SJ Cord only available in White or Black. <sup>3</sup>Power over wire cable color is not customizable.</small>

## Performance

Output <sup>1</sup>	indirect		direct	
	Watts/ft	Lumens/ft	Watts/ft	Lumens/ft
Low	4	340	4	216
Medium	5	511	5	262
High	7	670	7	349

<sup>1</sup>Based on a typically configured 90 CRI, 3500K luminaire using one driver.

Custom outputs available. Please consult factory.  
For 4000K multiply by 1.05; for 3000K 0.9%; for 2700K, 0.92.

## Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details

Modification date: February 2023

Page 2 of 4

# Rush indirect/direct

## Drivers & Electrical

Remote, dimmable drivers are supplied in enclosures. Our Power Over Wire systems delivers power to the luminaire via the suspension cables, eliminating a separate power feed. For remote driver box sizes, click [here](#).

## Emergency Back-Up

For fixtures three-feet or longer, a 4W emergency driver may be wired to 4ft sections. 7W, 10W, and 12W drivers are also available. Emergency circuits for use with building generators are also available.

## PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Moxel Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox. Consult Factory for systems not listed, See [here](#) for more info.

## Finishes

All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.

## Weight

1 lb per foot

## Optics


Extruded satin acrylic lenses provide excellent diffusion, high transmission, and no LED imaging. Glare-free, beam-shaping, optical cells are available for some models.

## Construction

Housings are extruded premium, recycled aluminum. Individual fixtures are available up to 12' long and may be specified as nominal or precision lengths.

## Joined Runs


Runs of any length may be specified and are comprised of multiple, factory-engineered, joined sections. Individually specified luminaires are not field joinable.

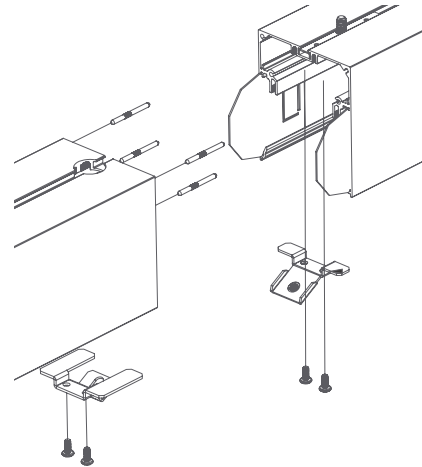

Representative joinery. For product specific details see installation guides or submittal drawings.

## Patterns


Featuring illuminated welded corners and angles. Consult factory for custom designs.

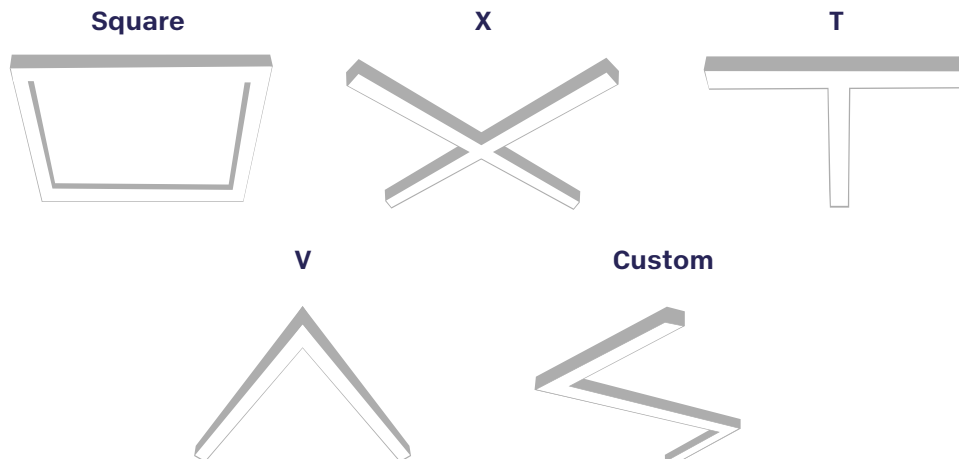


# Rush indirect/direct

## Mounting Options


Custom mounting types and ceiling transitions available; consult factory.

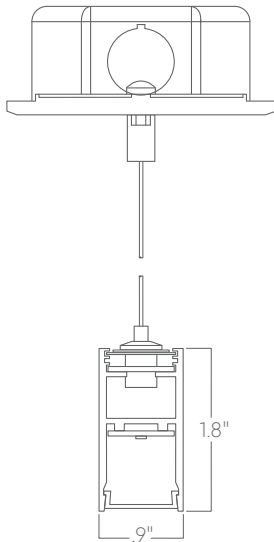


**Power over aircraft cable**

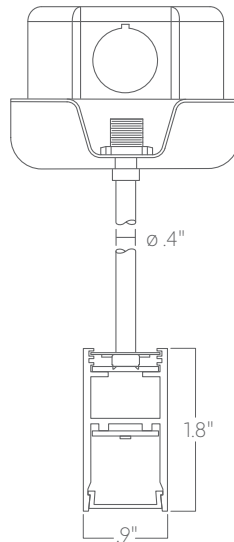


**Pendant stem**




**Wall mount**

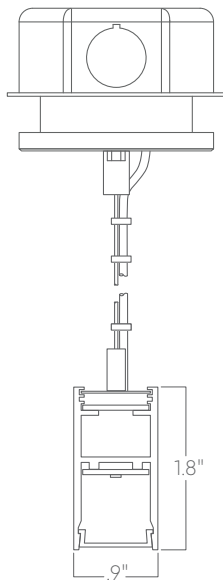

**Aircraft cable  
3.5" canopy**

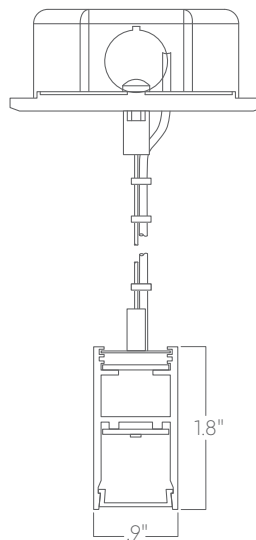

**Aircraft cable  
5" canopy**

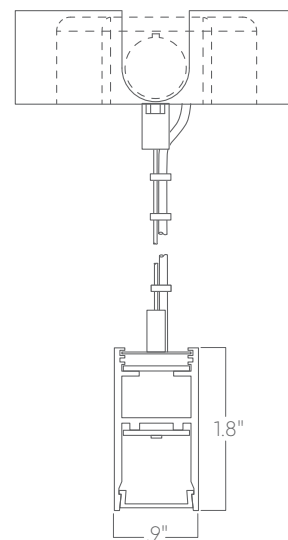

**Aircraft cable  
Conduit canopy  
with knockouts**