


Loop 18in

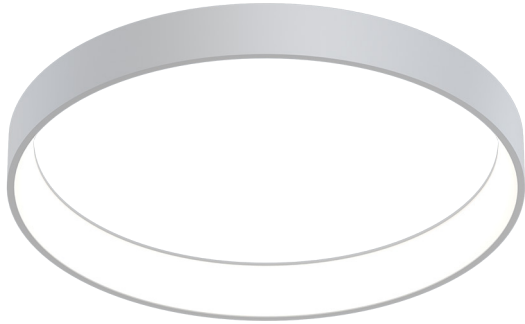


Our Performance Decorative luminaires offer a variety of decorative forms and sizes suitable for any modern space.

Features


- Power Over Wire system eliminates power cord
- 20% indirect, 80% direct distribution
- Specifiable color temperature. CRI > 90, R9 >50
- Custom colors and wood finishes finishes available
- Specifiable dimmable drivers or PoE
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)

Dimensions




*Suspension height is adjustable.


Optics



low



medium



high

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Loop 18in

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Length	3	Color Temperature	4	Output
	LOOP	18	18 in	27	2700K/90 CRI	LOW	Low output
				30	3000K/90 CRI	MED	Medium output
				35	3500K/90 CRI	HIGH	High output
				40	4000K/90 CRI	CUST	Custom output Specify Watts or lumens
5	Voltage	6	Driver	7	Finish	8	Mounting
	UNV Universal (120/277V) 347V 347V Available for DB Driver only	DB Standard 0-10V 1% Driver housed in canopy	DB.1% 0-10V 0.1% Driver housed in remote enclosure	W White	BLK Black	ACP-CENT Power over aircraft cable Single canopy at the center White canopy provided unless otherwise specified in section 12.	
		PoE Power over Ethernet Driver housing varies		SLV Silver	CC Custom Color See finish options here .	ACP-MULTI Power over aircraft cable Individual suspension points White canopies provided unless otherwise specified in section 12.	
				CWF Custom Wood Finish See finish options here .		SM Surface Mount	
9	Optics	10	Sensors/Controls	11	Circuit	12	Options
	SD Standard Diffuser	NA None	ACM Acuity nLight Module Only	NA None	EMPCK Emergency battery pack May require additional power feeds.	STD White Canopy + White Cord	
		CCS Casambi Module	AWN Lutron Athena Wireless Node Module	EMCKT Emergency circuit May require additional power feeds.	DAYCKT Daylight circuit May require additional power feeds.	CAN-X Canopy + color See finish options here	
		OTHER Consult Factory				SJ-BLK Black cord	
						SJ-WHT White cord	
						FC Flat Canopy Drivers provided in remote enclosure.	

Performance

Output ¹	Watts	Lumens
Low	21	1420
Medium	30	1972
High	40	2550

¹Based on a typically configured 90 CRI, 3500K luminaire using one driver.
Custom outputs available. Please consult factory.
For 4000K multiply by 1.05; for 3000K, 0.96; for 2700K, 0.92.

Technical Information



click [here](#) or
scan QR code

Wiring diagrams, PoE and sensor details

Loop 18in

Drivers & Electrical

Our Power Over Wire system delivers power to the luminaire via suspension cables, eliminating a separate power feed. Drivers are housed in the luminaire canopy or in factory supplied remote enclosures¹. All drivers are dimmable. For remote driver box sizes, click [here](#).

¹See order information for more details.

Emergency Back-Up

Emergency, battery-powered drivers are available. Emergency circuits for use with building generators are also available.

PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Moxel Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox. Consult Factory for systems not listed, See [here](#) for more info.

Weight

5 lbs

Mounting

Optics


Custom opal lens provides excellent diffusion, high transmission, and no LED imaging.

Construction


Die formed, heavy gauge rolled steel.

Finishes


All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.

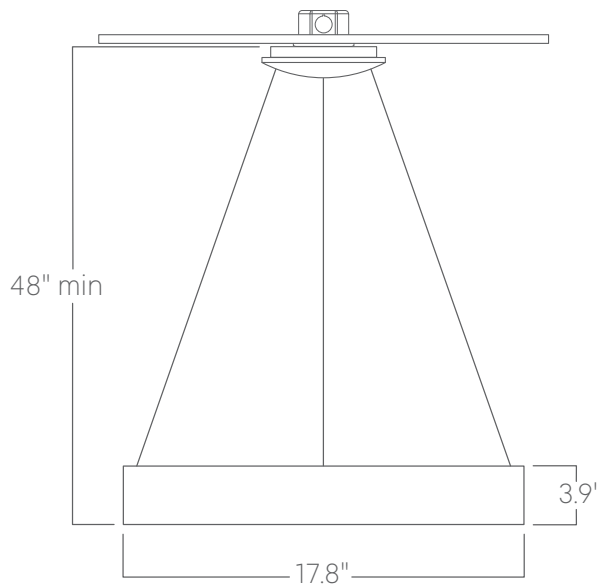

Power over aircraft cable

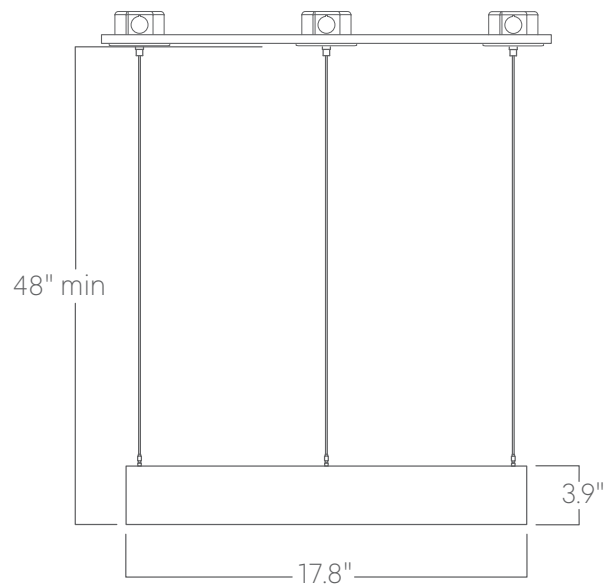

**Power over aircraft cable
(Individual susp. points)**

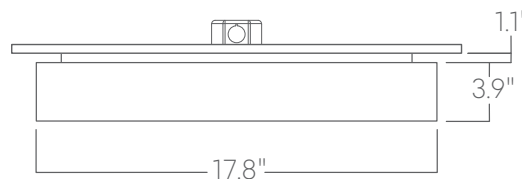

Surface mount