


Wave direct

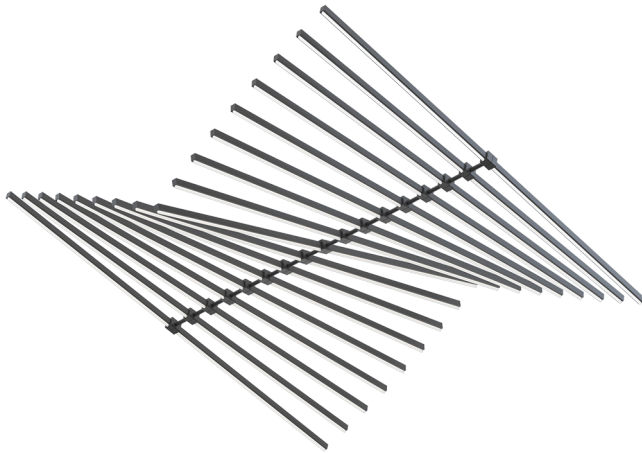


Our Performance Decorative luminaires offer a variety of decorative forms and sizes suitable for any modern space.


Features

- Extruded recycled aluminum housing
- Specifiable color temperature. CRI > 90, R9 >50
- Specifiable dimmable drivers or PoE
- Custom colors and wood finishes finishes available
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)

Dimensions

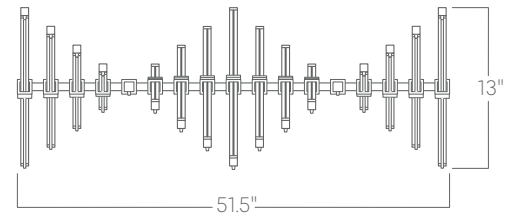

Optics

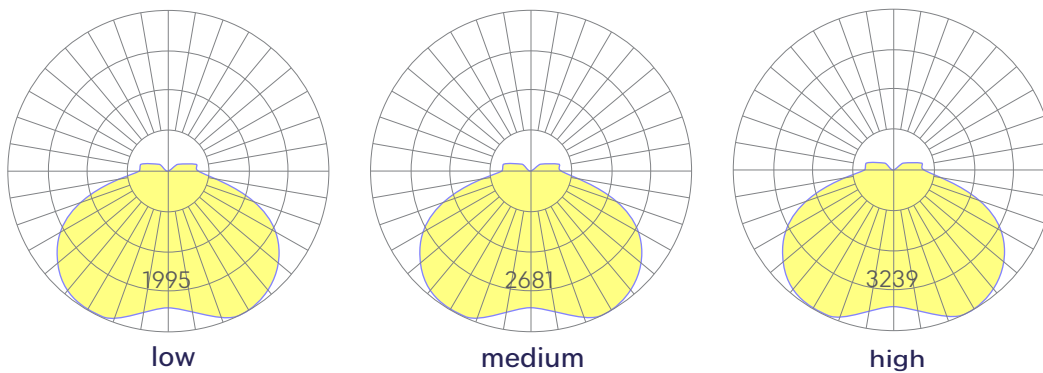

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Ordering Information

- - - - - - - - - - -

Example: WAVE - 4FT - 35K - MED - UNV - DB - W - PS12" - SD - CCS - DAYCKT - NA

Fixture ID <input type="text" value="1"/>	Size <input type="text" value="2"/>	Color Temperature <input type="text" value="3"/>	Output <input type="text" value="4"/>
WAVE	4 4 ft	30 3000K/90 CRI 35 3500K/90 CRI	LOW Low output MED Medium output HIGH High output CUST Custom output ¹
<small>¹consult factory</small>			
Voltage <input type="text" value="5"/>	Driver <input type="text" value="6"/>	Finish <input type="text" value="7"/>	Mounting <input type="text" value="8"/>
UNV Universal (120/277V) 347V ¹	DB Standard 0-10V 1% PoE Power over Ethernet.	W White BLK Black SLV Silver CC ¹ Custom Color	PS-X Pendant stem (12", 18", 24", 36", 48")
<small>¹Must use DB Driver</small>	<small>¹Custom Color. See finish options here.</small>		<small>White stems and canopy provided. Must specify other requests.</small>
Optics <input type="text" value="9"/>	Sensors/Controls <input type="text" value="10"/>	Circuit <input type="text" value="11"/>	Options <input type="text" value="12"/>
SD Standard Diffuser	NA None ACM Acuity nLight Module Only CCS Casambi Module AWNRLutron Athena Wireless Node Module	NA None EMCKT Emergency Circuit DAYCKT Daylight Circuit	NA None
<small>Consult factory for other options.</small>			

Performance

Output ¹	Watts	Lumens
Low	160	8040
Medium	215	10804
High	261	13116

Based on a typically configured 90 CRI, 3500K luminaire using one driver.²

¹Custom outputs available. Please consult factory.

²For 4000k, multiply by 1.05; for 3000k, 0.96; for 2700k, 0.92.

Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details

Modification date: June,2023

Page 2 of 3

Wave direct

Drivers & Electrical

Remote, dimmable drivers are supplied in enclosures.
For remote driver box sizes, click [here](#).

Emergency Back-Up

Emergency, battery-powered drivers are available.
Emergency circuits for use with building generators are also available.

PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Molex Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox.
Consult Factory for systems not listed. See [here](#) for more info.

Weight

40 lbs

Optics

Extruded satin acrylic TIR optic provides excellent diffusion, high transmission, and no LED imaging.


Construction

Extruded, recycled aluminum housing.

Finishes

All luminaires are finished in high quality polyester powder coating.
Our standard color is white. Any RAL color may be specified.

Mounting

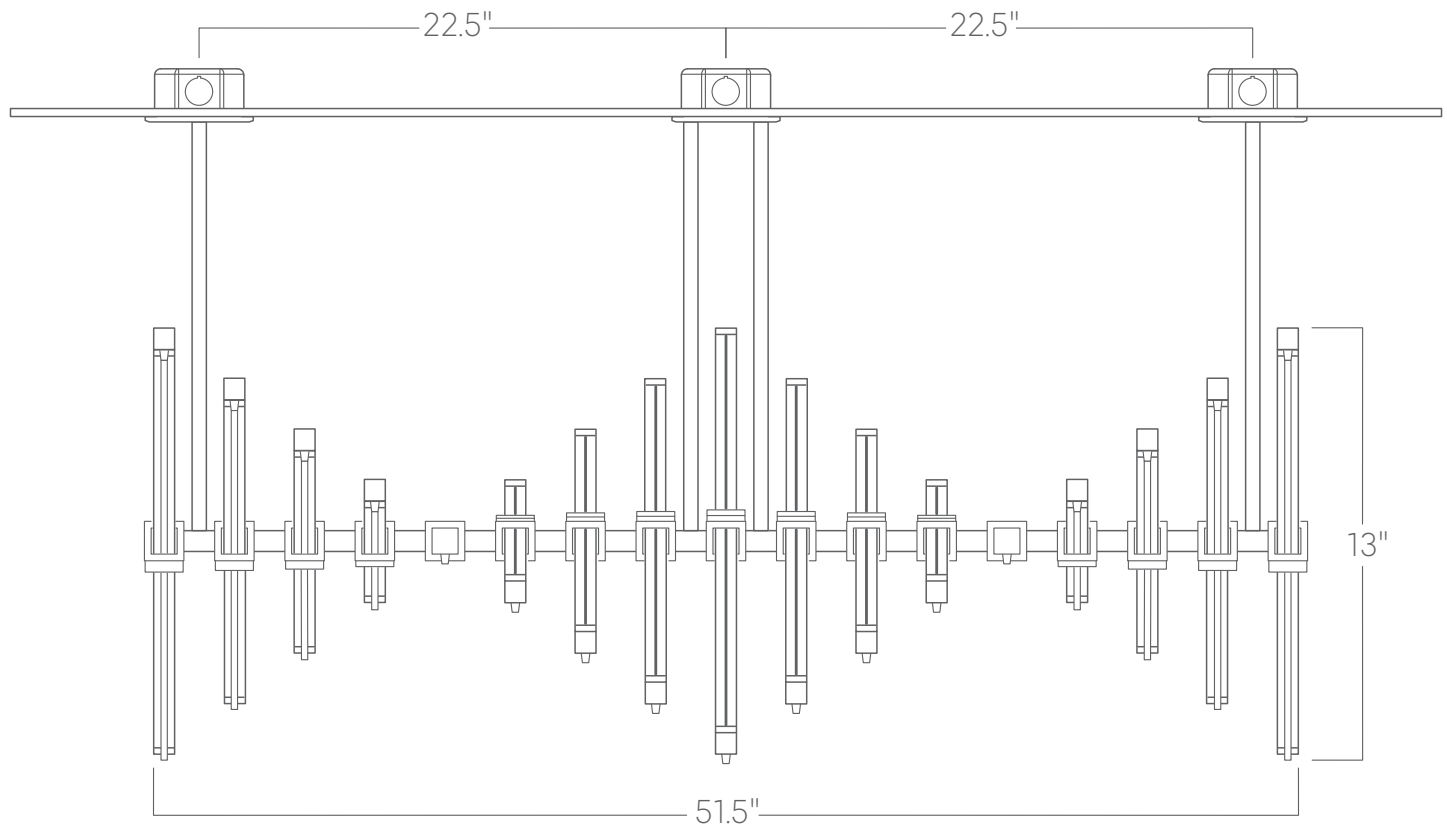

Pendant stem