

Adjustable Downlight




Adjustable, four-optic downlight module available with several beam spreads.


Features

- Four beam spreads available
- Beams adjustable up to 30° in all directions
- 8" in length
- Extruded, recycled, premium aluminum housing
- Aluminum core LED boards, specifiable optics
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty, damp location rated

Dimensions



Optics

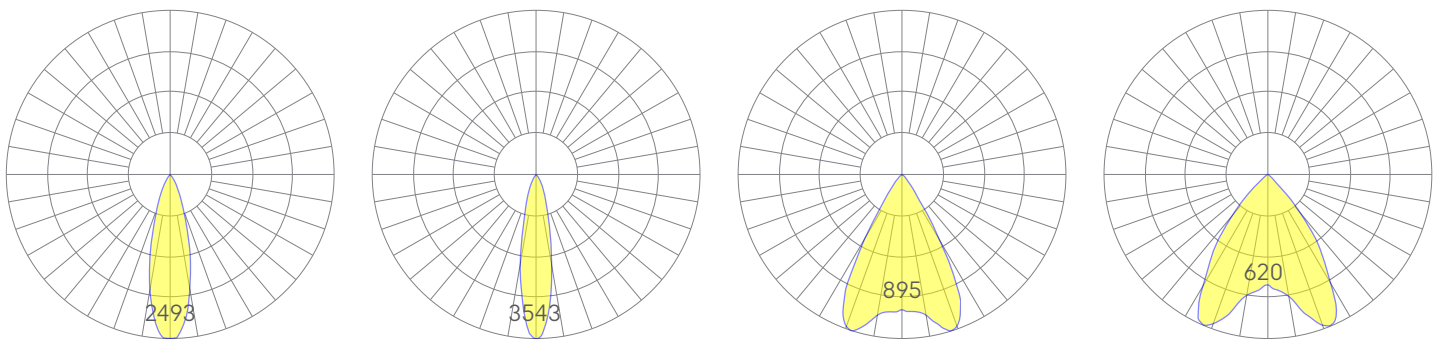

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Adjustable Downlight

Ordering Information



Example: DLADJ SA - 35 - MED - W - DB - UNV - SM - WFL - W

Fixture ID	1	Color Temperature	2	Output	3	Driver	4
DLADJ SA		27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI		LOW Low output MED Medium output HIGH High output		DB Standard 0-10V 1% DB.1% 0-10V 0.1% PoE Power over Ethernet	
All drivers are remote. For remote driver box sizes, click here .							
Voltage	5	Mounting	6	Beam Spread	7	Finish	8
UNV Universal (120/277V)		SM Surface mount PS-X Pendant stem (12", 18", 24", 36", 48")		SP 20° Beam; 3569 CBCP FL 30° Beam; 2542 CBCP WFL 62° Beam; 702 CBCP XWFL 80° Beam; 379 CBCP		BLK Black W White	
White stems and canopy provided. Must specify other requests						*Trim is white, nodes and plate must be black.	

Performance

Output ¹	Watts	Lumens
Low	9	562
Medium	12	728
High	16.75	908

Based on 'SP' beam spread, 90 CRI, 3500K luminaire using one driver.

¹For 4000k, multiply by 1.05; for 3000k, 0.96; for 2700k, 0.92