

Our Performance Decorative luminaires offer a variety of decorative forms and sizes suitable for any modern space.


Features

- Power Over Wire system eliminates power cord
- Bidirectional light distribution
- Extruded, rolled, welded recycled aluminum
- Specifiable color temperature. CRI > 90, R9 >50
- Specifiable dimmable drivers or PoE
- Custom colors and wood finishes finishes available
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)


Dimensions




Optics

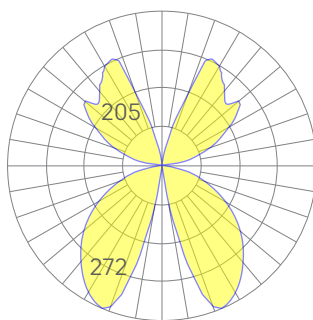

low

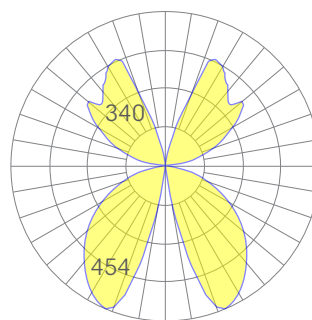

medium

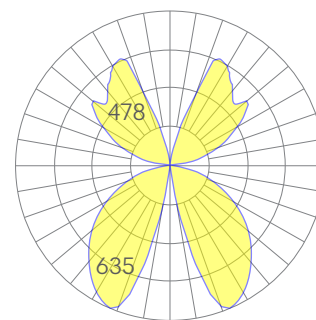

high

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Ordering Information



Example: OVALO - 8 - 35 - MED - UNV - DB - W - ACP-H - SD - CCS - DAYCKT - NA

Fixture ID <input type="text" value="1"/>	Length <input type="text" value="2"/>	Color Temperature <input type="text" value="3"/>	Output <input type="text" value="4"/>
OVALO	2 2 ft nominal length 3 3 ft nominal length 4 4 ft nominal length 6 6 ft nominal length 8 8 ft nominal length	27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI	LOW Low output MED Medium output HIGH High output CUST Custom output ¹
Voltage <input type="text" value="5"/>	Driver <input type="text" value="6"/>	Finish <input type="text" value="7"/>	Mounting <input type="text" value="8"/>
UNV Universal (120/277V) 347V¹ 347V	DB Standard 0-10V 1% DB.1% 0-10V 0.1% ELV² Reverse Phase 1% (120V only) TRI² Forward phase (120V only) LDE1 Lutron Digital EcoSystem DALI DALI-2 Driver PoE Power over Ethernet. DMX¹ DMX512 <small>¹Set to default address 001. Contact us for other addressing needs. ²For compatible dimmers, click here.</small> <small>All drivers remote</small>	W White BLK Black SLV Silver CC¹ Custom Color CWF¹ Custom Wood Finish <small>¹Custom Color. See finish options here. White SJ cord and canopy provided; for other requests, see section 12 to specify.</small>	ACP-H Horizontal Suspension, Power Over Aircraft Cable ACPH3.5 Horizontal Suspension, Power Over Aircraft Cable, 3.5" canopy + jbox adaptor ¹ ACP-V Vertical Suspension; ACPV3.5 Vertical Suspension, Power Over Aircraft Cable, 3.5" canopy + jbox adaptor ¹ <small>¹Adaptor must be mudded-in White stems and canopy provided unless otherwise specified in options (section 12).</small>
Optics <input type="text" value="9"/>	Sensors/Controls <input type="text" value="10"/>	Circuit <input type="text" value="11"/>	Options <input type="text" value="12"/>
SD Standard Diffuser	NA None ACM Acuity nLight Module Only CCS Casambi Module AWNRR Lutron Athena Wireless Node Module <small>Consult factory for other options.</small>	NA None EMPCK Emergency Battery Pack EMCKT Emergency Circuit DAYCKT Daylight Circuit	STD White Canopy + White Cord CAN-X¹ Canopy + color SJ-X² SJ Cord + color <small>¹See finish options here. ²SJ Cord only available in White or Black.</small>

Performance

Output ¹	Watts/ft	Lumens/ft
Low	4	283
Medium	7	472
High	10	660

¹Based on a typically configured 90 CRI, 3500K luminaire using one driver.

Custom outputs available. Please consult factory.
For 4000K multiply by 105; for 3000K 0.9%; for 2700K, 0.92.

Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details

Modification date: February 2023

Drivers & Electrical

Our Power Over Wire system delivers power to the luminaire via suspension cables, eliminating a separate power feed. Drivers are housed in factory supplied remote enclosures¹. All drivers are dimmable.

For remote driver box sizes, click [here](#).

¹See order information for more details.

Emergency Back-Up

Emergency, battery-powered drivers are available. Emergency circuits for use with building generators are also available.

PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Molex Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox.

Consult Factory for systems not listed, See [here](#) for more info.

Weight

2 lbs per foot

Optics

Laser cut acrylic lenses provide excellent diffusion, high transmission, and no LED imaging.

Construction

Welded, rolled, extruded recycled aluminum.


Finishes

All luminaires are finished in high quality polyester powder coating.


Our standard color is white. Any RAL color may be specified.

Mounting

Power over aircraft cable - horizontal mount

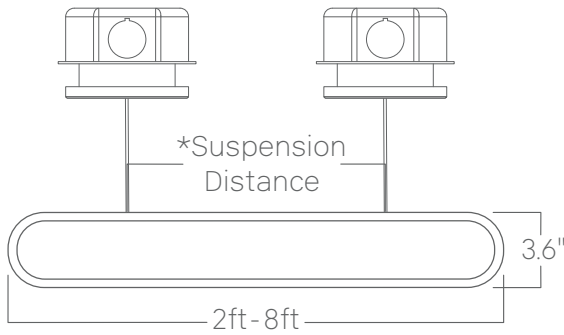

3.5" canopy

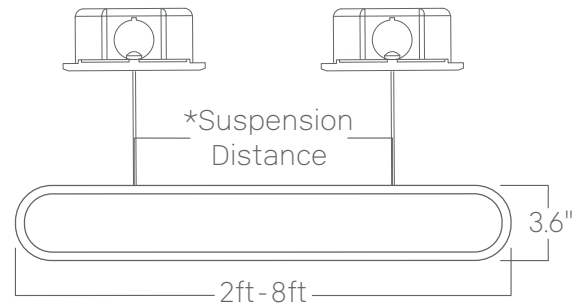

5" canopy

- *Suspension distance for horizontal mounting,
 2ft - 23.3"
 3ft - 34.9"
 4ft - 46.4"
 6ft - 69.2"
 8ft - 92.0"

Power over aircraft cable - vertical mount

