


# Linear span module

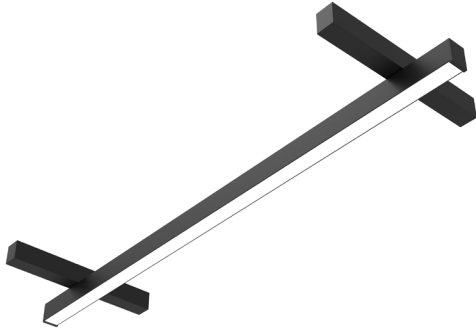


Rotatable linear module available in custom lengths and colors for general and task lighting.


## Features

- Spans across two Magneto tracks
- Magnetically held and easily repositioned on site
- Available in lengths up to 8' (5.5" increments)
- Extruded, recycled, premium aluminum housing
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty

## Dimensions



## Optics

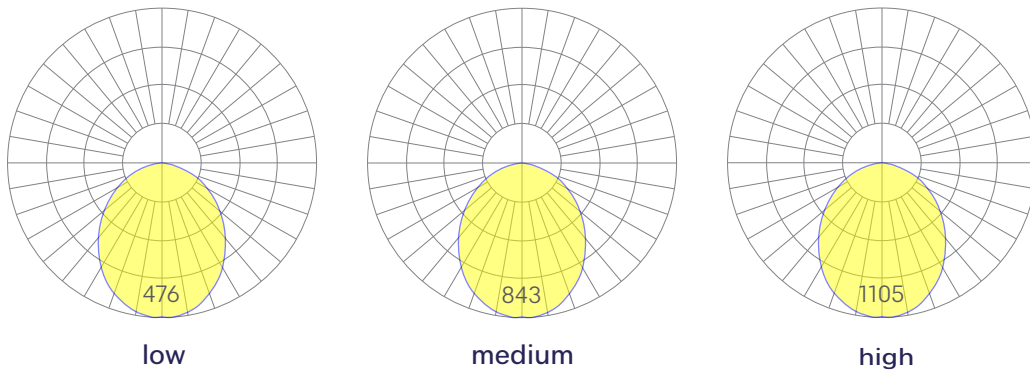

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# Linear span module



## Ordering Information

-  -  -  -  -   
 1            2            3            4            5            6

Example:            MAG-LIN SPAN - 2' - 35 - MED - W - NA

<b>Fixture ID</b>	<input type="text" value="1"/>	<b>Length (Nominal)</b>	<input type="text" value="2"/>	<b>Color Temperature</b>	<input type="text" value="3"/>	<b>Output</b>	<input type="text" value="4"/>
<b>MAG - LIN SPAN</b>		1    1 ft 2    2 ft 4    4 ft 6    6 ft 8    8 ft X'    Specify length  <small>*Custom lengths up to 8'. Specify to the nearest 5.5" increments.</small>		27    2700K/90 CRI 30    3000K/90 CRI 35    3500K/90 CRI 40    4000K/90 CRI		<b>LOW</b> Low output <b>MED</b> Medium output <b>HIGH</b> High output	
<b>Finish</b>	<input type="text" value="5"/>	<b>Circuit</b>	<input type="text" value="6"/>				
<b>W</b> White <b>BLK</b> Black <b>SLV</b> Silver <b>CC'</b> Custom Color  <small>*Custom Color. See finish options <a href="#">here</a>.</small>		<b>NA</b> None <b>EMPCK</b> Emergency Battery Pack <b>EMCKT</b> Emergency Circuit		<small>*EM sections are fixed in position at the factory by code and must be marked on the submittal drawing.</small>			

## Performance

Output <sup>1</sup>	Watts/ft	Lumens/ft
Low	5	280
Medium	8	500
High	13	650

Based on a typically configured 90 CRI, 3500K luminaire using one driver.

<sup>1</sup>For 4000k, multiply by 1.05; for 3000k, 0.96; for 2700k, 0.92.