

# Nu Drop Narrow Direct








Stylish accent lighting for surface-mounted or suspended applications. Four beam-spread options and four finish options.

## Features

- Extruded, recycled, premium aluminum housing
- Integral dimmable driver
- Decorative fluted rubber sleeve
- Four beam-spread options
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty, damp location rated

## Dimensions

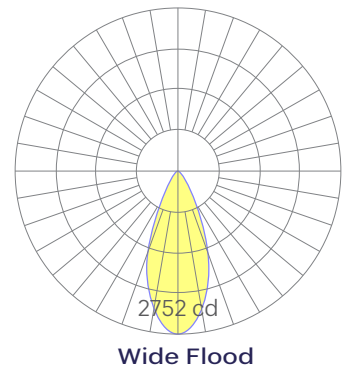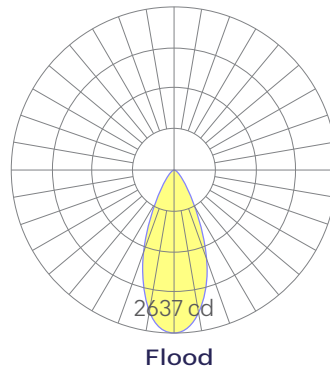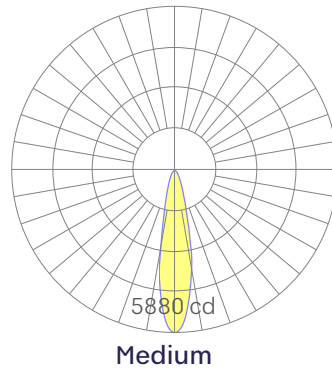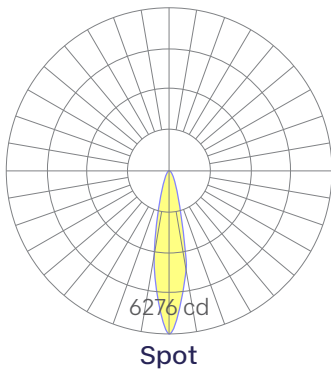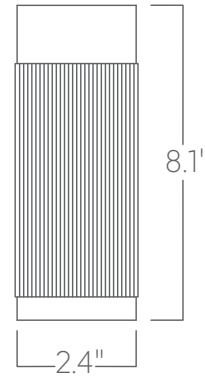

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# Nu Drop Narrow Direct

## Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Length	3	Color Temperature	4	Output
	<b>NuDrop-N</b>	<b>8</b>	8 inch nominal	<b>27</b>	2700K/90 CRI	<b>LOW</b>	Low output
				<b>30</b>	3000K/90 CRI	<b>MED</b>	Medium output
				<b>35</b>	3500K/90 CRI	<b>HIGH</b>	High output
				<b>40</b>	4000K/90 CRI		
5	Voltage	6	Driver	7	Finish	8	Mounting
	<b>UNV</b> Universal (120/277V)	<b>DB</b>	Standard 0-10V 1% dimming	<b>BLK</b>	Black housing black fluted sleeve	<b>CP</b>	Cable Pendant
				<b>WHT</b>	White housing black fluted sleeve	<b>SM</b>	Surface Mount
				<b>GOLD</b>	Gold housing black fluted sleeve	<b>CTD-SM</b>	Connect the Drops: Surface Mount
				<b>SILVER</b>	Silver housing black fluted sleeve	<b>PS-X</b>	Pendant Stem (12", 18", 24", 36", 48")
9	Beam Spread	10	Circuit	11	Options		
	<b>SP</b> 17° Beam	<b>NA</b>	None	<b>NA</b>	None		
	<b>MED</b> 25° Beam	<b>EMPCK</b>	Emergency battery pack Supplied in remote enclosure	<b>HEX</b>	Hex Louver		
	<b>FL</b> 41° Beam	<b>EMCKT</b>	Emergency circuit May require additional power feeds				
	<b>WFL</b> 65° Beam						

## Performance

Output <sup>1</sup>	Watts	Lumens
Medium	12	1112
High	18	1547

<sup>1</sup>Based on 6" tall fixture, WFL beam spread, 90 CRI, and 3500K luminaire using one driver. Custom outputs available. Please consult factory.  
For 4000K multiply by 102; for 3000K, 0.98; for 2700K, 0.96.

## Technical Information




click [here](#) or scan QR code


Wiring diagrams, PoE and sensor details

# Nu Drop Narrow Direct


## Mounting Options

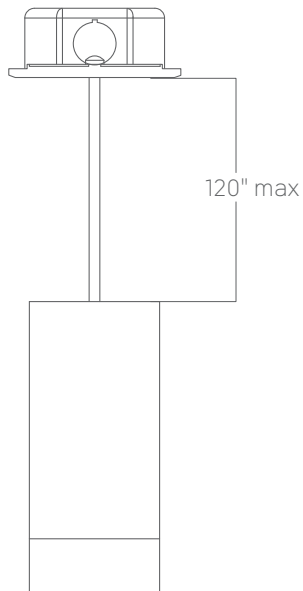


Cable Pendant

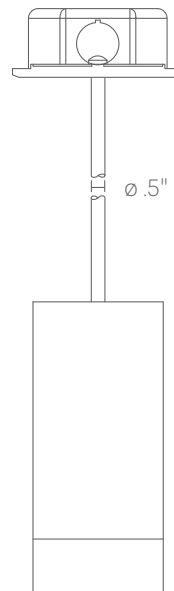

Pendant stem

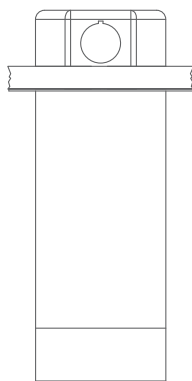

Surface Mount

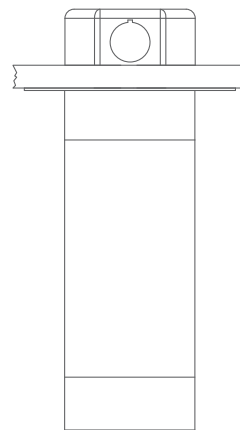


Connect the Drops


# Nu Drop Narrow Direct

## Sample Sketch


Please submit a sketch indicating shape of the pattern and length of the square conduit that will connect the drops (any length up to 8 feet). See example below.

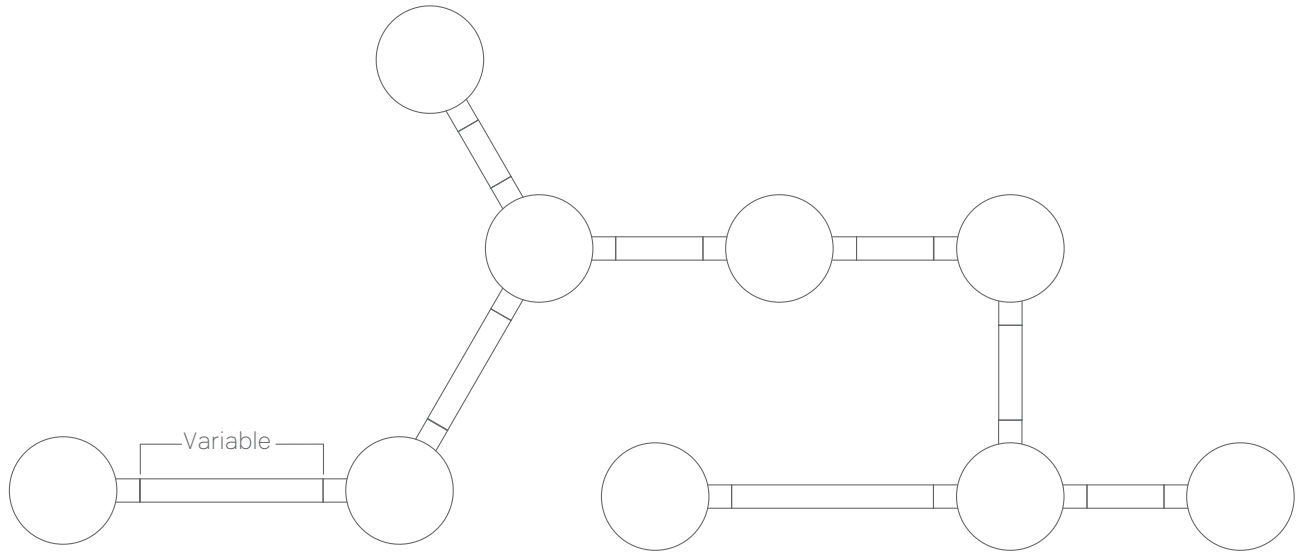


## Components




Single Connector

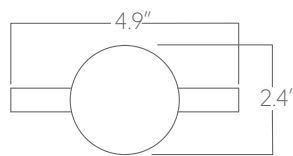


Straight Connector

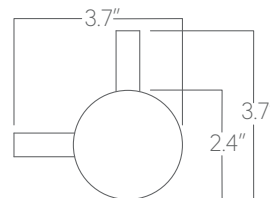


90° Connector

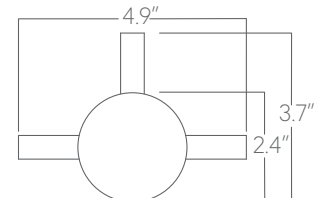


"T" Connector

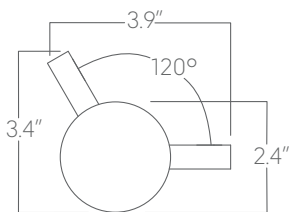


Two-Way 120° Connector

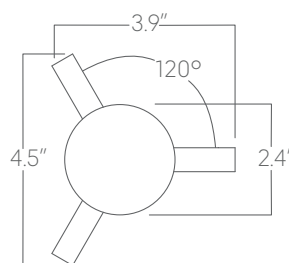

Three-Way 120° Connector

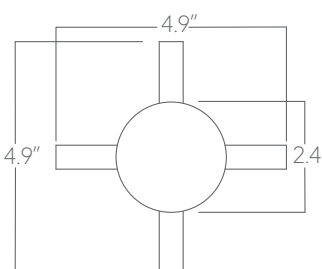

"X" Connector

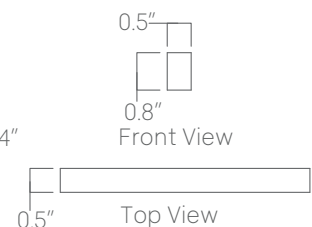

Square Conduit (Up to 8ft)