


# Lucie Circle direct

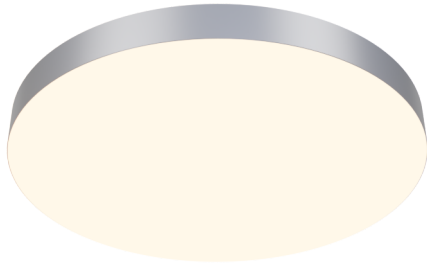


Create a luminous ceiling with our back-lit, projection fabric luminaire. Standard or custom sizes are available to suit any modern space.


## Features

- Extruded recycled aluminum housing
- Specifiable color temperature. CRI > 90, R9 >50
- Custom sizes and finishes available
- Integral specifiable dimmable drivers or PoE
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)


## Dimensions




## Optics



low



medium



high

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# Lucie Circle direct

## Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Size	3	Color Temperature	4	Output
	<b>LUCIE-C</b>	<b>2</b>	2-Ft nominal diameter	<b>27</b>	2700K/90 CRI	<b>LOW</b>	Low output
		<b>3</b>	3-Ft nominal diameter	<b>30</b>	3000K/90 CRI	<b>MED</b>	Medium output
		<b>4</b>	4-Ft nominal diameter	<b>35</b>	3500K/90 CRI	<b>HIGH</b>	High output
				<b>40</b>	4000K/90 CRI	<b>CUST</b>	Custom output Specify Watts or lumens
				<b>TW</b>	Tunable white, 2700K-6500K Must use TW10 or PSQ driver.		
5	Voltage	6	Driver	7	Finish	8	Mounting
	<b>UNV</b> Universal (120/277V)	<b>DB</b> Standard 0-10V 1%		<b>W</b> White		<b>AC</b> Aircraft Cable	50' steel cable provided White canopies and power cord unless option specified in section 12
	<b>347V</b> 347V Available for DB Driver only	<b>DB.1%</b> 0-10V 0.1%		<b>BLK</b> Black		<b>AC3.5</b> 3.5" canopy + jbox adaptor	adaptor must be muddled-in. White stems and canopy unless option specified in section 12
		<b>ELV</b> Reverse Phase 1% (120V only) For compatible dimmers, <a href="#">click here</a> .		<b>SLV</b> Silver		<b>ACCC</b> Aircraft cable to Conduit	Pipe Canopy
		<b>TRI</b> Forward phase (120V only) For compatible dimmers, <a href="#">click here</a> .		<b>CC</b> Custom Color See finish options <a href="#">here</a> .		<b>SM</b> Surface Mount	
		<b>LDE1</b> Lutron Digital EcoSystem					
		<b>DALI</b> DALI-2 Driver					
		<b>PoE</b> Power over ethernet.					
		<b>TW10</b> 2 ch, 0-10V for tunable white.					
		<b>PSQ</b> Lutron T-Series 2-channel 1% For tunable white					
		<b>DMX</b> DMX512 All DMX drivers set to default address 001 and provided in remote enclosures. Contact us for other addressing needs.					
9	Optics	10	Sensors/Controls	11	Circuit	12	Options
	<b>SD</b> Standard Diffuser	<b>NA</b> None		<b>NA</b> None		<b>NA</b> None	
	<b>SI</b> Customer Supplied Image 50-100 DPI at fixture size Acceptable file types include PSD, PSB, TIFF, AI or EPS.	<b>ACM</b> Acuity nLight Module Only		<b>EMCKT</b> Emergency circuit May require additional power feeds.			
		<b>CCS</b> Casambi Module		<b>DAYCKT</b> Daylight circuit May require additional power feeds.			
		<b>AWNRR</b> Lutron Athena Wireless Node Module					
		<b>OTHER</b> Consult Factory					

## Performance

Output <sup>1</sup>	Watts	Lumens
Low	80	4508
Medium	119	6387
High	160	8330

<sup>1</sup>Based on a typically configured 4ft diameter, 90 CRI, 3500K luminaire using one driver.  
Custom outputs available. Please consult factory.  
For 4000K multiply by 102, for 3000K 0.98, for 2700K 0.96; these multipliers also apply to Tunable White.  
For Tunable White outputs, multiply by 1.05 for 5000K and by 1.1 for 6500K.

## Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details

# Lucie Circle direct

## Drivers & Electrical

Integral drivers\* with 0-10V Dimming standard. Several other driver options available; see ordering information.

\*DMX drivers are provided in remote enclosures.

## Controls

Control modules may be mounted remotely.

## Emergency Back-Up

Emergency, battery-powered drivers are available. Emergency circuits for use with building generators are also available.

## PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Molex Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox. Consult Factory for systems not listed, See [here](#) for more info.

## Weight

3 lbs per square foot

## Optics

Luminous projection fabric provides excellent diffusion, high transmission, and no LED imaging.

## Construction

Housings are extruded, recycled aluminum. Fixtures are available up to 4' nominal diameter


## Finishes

All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.


# Lucie Circle direct

## Mounting Options


Custom mounting types and ceiling transitions available; consult factory.

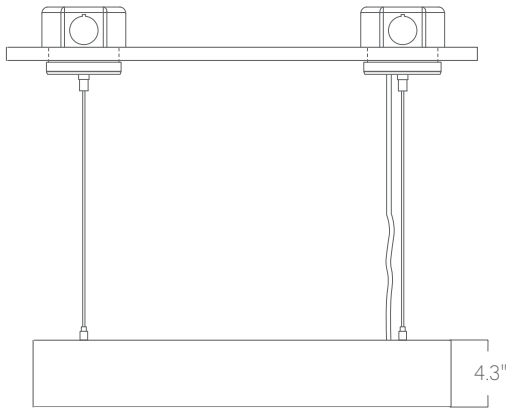


**AC3.5 - Aircraft cable, 3.5" canopy**

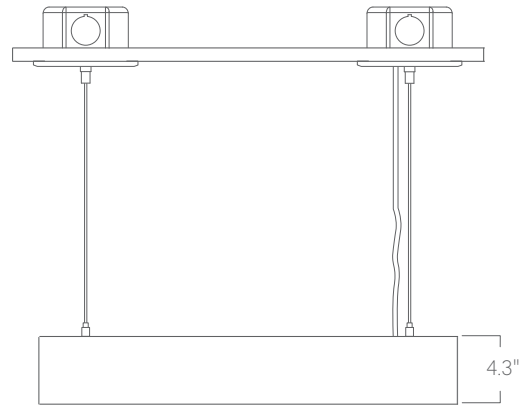

**AC - Aircraft cable, 5" canopy**

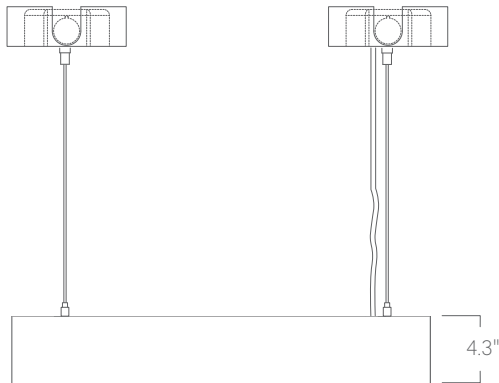

**ACCC - Aircraft cable to Conduit Pipe Canopy**

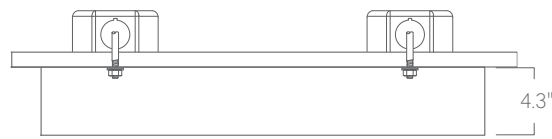

**SM - Surface mount**

**Please consult factory shop drawings for suspension points. To prevent damage to fixtures, factory designated suspension points must not be field altered.**